

# 3M™ PELTOR™ WorkTunes™ Pro Headset

## Technical Data Sheet

### Description

The 3M™ PELTOR™ WorkTunes™ Pro Headset helps protect you from potentially harmful workplace noise while at the same time enjoy listening to the built in AM/FM radio. The built-in antenna, fast digital tuning and ability to store stations makes the hearing protector flexible and easy to work with.

### Features

- Practical design and user friendly functions will help you during your working day
- AM/FM Radio headset with built-in antenna
- Digital station search
- Voice guided menu system with announced frequencies
- Store up to 5 stations
- 3.5 mm listen only stereo input\* for connection to external devices (e.g. cell phone, two-way radio, Ipod).
- Auto power off, the headset will turn off after 4 hrs of non-use to save battery
- Low-battery warning at low battery level
- To reduce the corrosion caused by sweat the electronics are located in the outer part of the cup
- Available in both in headband and helmet attach versions (black).
- Compatible with 3M™ E-A-Rfit validation system

### Applications

3M™ PELTOR™ WorkTunes™ Pro Headset with built-in AM/FM receiver can be used in noisy industrial sites as well as farming or landscaping activities.

### Standards

This 3M™ PELTOR™ Hearing protector has been tested by an accredited laboratory in accordance with the requirements in AS/NZS 1270 and has met the specifications of hearing protectors Class 5. When selected, used and maintained as specified in AS/NZS 1269, this hearing protector may be used in noise up to 110 dB(A) assuming an 85 dB(A) criterion. A lower criterion may require a higher protector class.

For a copy of the declaration of conformity and any additional information required by the regulations, please contact 3M in the country where the purchase was made.



HRXS221A



HRXS221P3E



Hearing protection  
with built-in  
AM/FM radio



Hearing protection  
with external  
audio input

\*For user protection, output from headset is not above 82 dB for all sources at a maximum power of 250 mV RMS.

## Quick Reference

	3M™ PELTOR™ WorkTunes™ Pro AM/FM Headset	
	HRXS221A Headband	HRXS221P3E Helmet Attach
<b>Attenuation Data</b>		
SLC80	32dB	30dB
Class	5	5
Tested to	AS/NZS 1270:2002	AS/NZS 1270:2003
<b>Physical Properties</b>		
Clamp Force	11.1 N	12 N
Weight (Batteries Included)	303g	355g
<b>Material Listing</b>		
Cup	ABS Plastic	
Headband	PVC, PA, Stainless Steel Wire	N/A
Helmet Attachment Arm	N/A	Stainless Steel Wire
Two-Point Fastener	POM	
Cushion	PVC foil and PUR foam	
Insert (Liner)	PUR foam	
Level Dependent Microphone for Ambient Listening	N/A	
Latch	PA	
On/Off/Mode/+/- Button	TPE	
Charger jack	Stainless Steel	
<b>Specifications</b>		
Battery Type	2xAA Alkaline batteries	
Operating Time	Approximately 40 hours of battery lifetime	
Wired connectivity	3.5mm listen-only stereo input jack*	
Microphone/ Type	N/A	
Operating temperature	-20°C (-4°F) to 50°C (122°F) (battery dependent)	
Storage temperature	-20°C (-4°F) to 40°C (104°F). <90% humidity	
Product lifetime	Up to 5 years (excl. batteries)	
<b>Other</b>		
Colour	Black	
Hygiene Kit	HY220	
Compatible with 3M™ E-A-Rfit™ Validation System	Yes	
Helmet Attachment Backplate	N/A	On Product P3E (30mm)
<b>Use limitation: Never modify or alter this product.</b>		

\*For user protection, output from headset is not above 82 dB for all sources at a maximum power of 250 mV RMS.

## Fitting Instructions

Inspect the hearing protector before each use. If damaged, select an undamaged hearing protector or avoid the noisy environment.

When additional personal protective equipment is necessary (e.g. safety glasses, respirators, etc.), select flexible, low profile temples or straps to minimize interference with the earmuff cushion. Remove all other unnecessary articles (e.g. hair, hats, jewelry, headphones, hygiene covers, etc.) that could interfere with the seal of the earmuff cushion and reduce the protection of the earmuff.

## Headband Headset

### To fit the hearing protector:


1. Slide out the cups and tilt the top of the cup out, as the cable must be on the outside of the headband (Fig 1).
2. Pull the cups apart and place the ear muffs over the ears so that the cushions form a snug seal around the ears.
3. Adjust the height of the cups by sliding them up or down while holding the headband in place (Fig 2).
4. The headband should be positioned across the top of your head (Fig 3).



## Helmet Attach Headset

### To fit the hearing protector:

- **Fit the cup:** Push the attachment blade firmly into the slot on the side of the helmet until it clicks into place (Fig 1 & 2)
- **Working position:** With the cups over the ears press the arms inwards until you hear a click on both sides indicating a firm seal (Fig 3).
- **Stand-by position:** Lift the cups to the fixed stand-by position. In a noisy environment the ear muffs must be worn in the working position at all times (Fig 4).
- **Parking position:** First lift the cups to the stand-by position (Fig 4), then rotate them up to the next fixed position.
- **Ventilation mode:** Avoid placing the cups against the helmet as this prevents ventilation (Fig 5).
- **Storage Position:** When the helmet is not in use, lower the earmuffs and press them inward. Keep the cups clean and dry and store at normal room temperature.

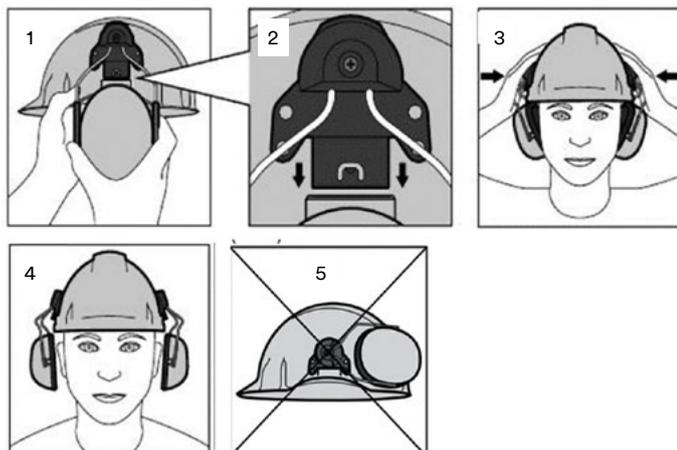

## Fit Check

When hearing protectors are correctly worn, your voice should sound hollow and sounds around you should not sound as loud as before.

## Hearing Protector Fit Testing the 3M™ E-A-Rfit™ Dual-Ear Validation System

The success of your hearing conservation program requires more than offering earplugs or earmuffs. Each worker needs to wear the most effective hearing protector for the environment and the correct fit for their unique anatomy. With 3M™ E-A-Rfit™ Dual-Ear Validation System, you can quickly identify how much protection each worker receives from their 3M hearing protectors.

## The Technology Behind 3M™ E-A-Rfit™

The 3M™ E-A-Rfit™ Dual-Ear Validation System is based on Field Microphone-In-Real Ear (F-MIRE) technology that measures the effectiveness of hearing protectors from inside a worker's ears, providing accurate, quantitative results.

The tester wears a pair of modified 3M™ probed hearing protectors connected to a dual-element microphone. A loudspeaker is placed in front of the tester. When it emits a broadband noise, the dual-element microphone measures the signal in the ear canal and outside the ear plug. In less than five seconds, the difference between the two measurements is calculated and a Personal Attenuation Rating (PAR) is displayed.

## It Starts with PAR

The 3M™ E-A-Rfit™ Validation System puts the worker in the context of their noise environment and helps you understand their level of attenuation.

The results you get from the 3M™ E-A-Rfit™ is displayed as a PAR. The PAR is a numerical value that shows the reduction in sound level within the ear when a hearing protector is worn. The resulting PAR, combined with the worker's exposure to noise, is used to determine if a worker is receiving appropriate protection from the noise hazard.

Knowing the PAR lets you identify workers who are inadequately protected, so you can provide real-time intervention and training.

## Key Benefits of the 3M™ E-A-Rfit™ Dual-Ear Validation System include:

- Tests both ears simultaneously in less than 5 seconds
- Science-based, quantitative testing
- Fast, clear, and accurate results
- Tests 7 frequencies 125Hz to 8000Hz
- 3M™ Earplug, earmuff and headset (comms) testing capability

Contact your 3M Personal Safety Specialist to find out more about our 3M™ E-A-Rfit™ Dual-Ear Validation System or for assistance in solving your complex or day-to-day hearing conservation challenges.

## Attenuation Data

### 3M™ PELTOR™ WorkTunes™ Pro AM/FM Radio Headset, Headband - HRXS221A

AS/NZS 1270:2002

Test Frequency (HZ)	125	250	500	1000	2000	4000	8000	SLC <sub>80</sub>	Class	Clamp Force
Mean Attenuation (dB)	17.6	22.1	29.9	36.4	37.6	38.4	34.9	32dB	5	11.1 N
Standard Deviation (SD) (dB)	3.7	3.7	3.3	2.8	2.2	2.4	2.6			
Means minus SD (dB)	13.9	18.4	26.6	33.6	35.4	36.0	32.3			

Hearing protector Class 5 tested to AS/NZS1270. When selected, used and maintained as specified in AS/NZS1269, this protector may be used in noise up to 110dB(A) assuming an 85dB(A) criterion. A lower criterion may require a higher protection class.

### 3M™ PELTOR™ WorkTunes™ Pro AM/FM Radio Headset, Helmet Attach - HRXS221P3E\*

AS/NZS 1270:2002

Test Frequency (HZ)	125	250	500	1000	2000	4000	8000	SLC <sub>80</sub>	Class	Clamp Force
Mean Attenuation (dB)	18.1	21.1	29.4	33.9	35.2	36.2	34.2	30dB	5	12 N
Standard Deviation (SD) (dB)	2.5	1.9	3.9	2.8	2.9	4.2	3.4			
Means minus SD (dB)	15.6	19.2	25.5	31.1	32.3	32.0	30.8			

Hearing protector Class 5 tested to AS/NZS1270. When selected, used and maintained as specified in AS/NZS1269, this protector may be used in noise up to 110dB(A) assuming an 85dB(A) criterion. A lower criterion may require a higher protection class.

\* These earmuffs were tested in combination with the HC600 industrial safety helmet using the P3G adapter and may give different levels of protection if fitted to different helmets.

## Key

**Mean** = Mean attenuation value derived from testing in accordance with AS/NZS 1270:2002.

**SD** = Standard Deviation derived from testing in accordance with AS/NZS 1270:2002.

**Mean-SD** = Mean attenuation value minus Standard Deviation

**SLC<sub>80</sub>** = Single number rating commonly used in Australia and New Zealand to compare acoustic performance of hearing protectors. The subscript '80' indicates that in well managed hearing protector programs, the protection provided is expected to equal or exceed the SLC80 in 80% of protector-wearer noise spectrum combinations.

**Class** = A simplified process for selecting hearing protectors based on the wearers 8-hour equivalent continuous A-weighted sound pressure level.

3M strongly recommends personal fit testing of hearing protectors. Research suggests that users may receive less noise reduction than indicated by the attenuation label value(s) on the packaging due to variation in fit, fitting skill, and motivation of the user. Refer to applicable regulations and guidance on how to adjust attenuation label value(s). In the absence of applicable regulations, it is recommended that the attenuation label value(s) be reduced to better estimate typical protection.

The effectiveness of a hearing protector reduces dramatically when the hearing protector does not fit properly, is incorrectly inserted or is not worn 100% of the time during ALL hazardous noise events. Removal of the hearing protector, even for brief moments, substantially reduces protection and greatly increases the risk of hearing damage.

## Cleaning and Maintenance

Follow recommended care and cleaning instructions in order to maintain best noise reduction and function.

### Cleaning

- Carry out a visual battery condition check. Replace if battery leakage or defects are detected.
- Use a cloth wetted with soap and warm water to clean the outer shells, headband and ear cushions.


**NOTE: Do NOT** immerse the hearing protector in water.

If the hearing protector gets wet from rain or sweat, turn the earmuffs outwards, remove the ear cushions and foam liners, and allow to dry before reassembly. The ear cushions and foam liners may deteriorate with use and should be examined at regular intervals for cracking or other damage. When used regularly, 3M recommends replacing the foam liners and ear cushions at least twice a year to maintain consistent attenuation, hygiene, and comfort. In hot and humid environments more frequent changes may be required to maintain acceptable hygiene. If an ear cushion is damaged, it should be replaced.


### Maintenance - Changing the Hygiene Kit

Cushions and inserts can be replaced by using the approved Hygiene Kits for your 3M™ PELTOR™ Product. See 'Ordering Information' section.

1. Remove the cushions and inserts as shown.

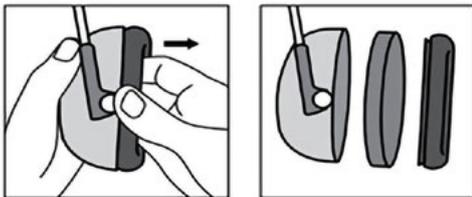

2. Replace the worn or damaged cushions and insert with the new pair from the approved hygiene kit.

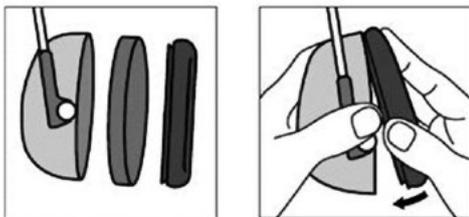

- 3M™ PELTOR™ HY100A Clean Hygiene Pads can be applied onto the earmuff cushions to help absorb sweat and moisture for improved comfort and hygiene.

## Storage

- Store the product in a clean and dry area before and after use.
- Remove batteries before storing the product for extended periods
- Always store the product in the original packaging and away from any sources of direct heat or sunlight, dust and damaging chemicals.
- Storage temperature range: -20°C (-4°F) to 40°C (104°F).
- Relative humidity: <90%.
- For headband versions: make sure that no force is applied to the headband and that the cushions are not compressed.
- Helmet attachment version: ensure the earmuffs are in the storage position and that the cushions are not compressed.

## Disposal

If the product is to be disposed\*, it should be disassembled and disposed of as solid waste. Please see local authority regulations for disposal advice and locations

\* Discard the product within 5 years from date of manufacture or immediately if damaged or cannot be cleaned.

**Australia:** Customers must refer to their Local Council Municipal area for disposal of electronics at their end of life.

**New Zealand:** Customers must dispose of electronics at their end of life in their local e-waste disposal bins.

## Ordering Information

SAP ID	Legacy ID	Availability		Model #	Description
		AUS	NZ		
<b>Headsets</b>					
7100089368	UU004690713	•	•	HRXS221A	3M™ PELTOR™ WorkTunes™ Pro AM/FM Radio Headset Headband, HRXS221A, Black, SLC <sub>80</sub> 32dB (Class 5), 10 EA/ Case
7100089440	UU004690663	•	•	HRXS221P3E	3M™ PELTOR™ WorkTunes™ Pro AM/FM Radio Headset Helmet Mounted, HRXS221P3E, SLC <sub>80</sub> 30dB (Class 5), 10 EA/ Case
<b>Accessories - Cable</b>					
7000108359	XH001676952	•	•	FL6CE/1	3M™ PELTOR™ Cable FL6CE/1, with Stereo 3.5 mm Plug, 80 1 Each
<b>Accessories - Helmet Adaptors/Blades</b>					
7100383325	UU010853503	•	•	ZGS/2 (25mm)	3M™ PELTOR™ Helmet Adaptors for 3M Scott Safety Visor Z3GS/2 (25mm)
7100383334	XL001642484	•	•	Z3G/2 (25mm)	3M™ PELTOR™ Helmet Adaptors for 3M Visor Range Z3G/2 (25mm)
<b>Accessories - Hygiene</b>					
7100101874	UU008049353	•	•	HY220	3M™ PELTOR™ Earmuff Hygiene Kit HY220, 1 ea/Bag
7100064410	XH001651351	•	•	HY100A	3M™ PELTOR™ Clean Hygiene Pads HY100A, 100 Pairs/Carton
7100064607	XH001655360	•		FP9007	3M™ PELTOR™ Padded Headset Bag FP9007, Black
<b>3M™ E-A-Rfit™ Dual-Ear Validation System - Probe</b>					
7100062126	70071691110	•	•	393-3001-2	3M™ PELTOR™ X1/X2 Earmuff Probed Test Cushions B, 393-3001-2, 2 ea/Kit

### In the box

- 1 x Headset
- 2 x AA batteries
- 1 x User Instruction

### Warning

These hearing protectors help reduce exposure to hazardous noise and other loud sounds. Misuse or failure to wear hearing protectors at all times that you are exposed to noise may result in hearing loss or injury. For proper use, see supervisor or User Instructions.

Always ensure the hearing protection device (HPD) is:

- Suitable for the application;
- Fitted correctly;
- Worn during all periods of exposure;
- Replaced when necessary.

### Important Notice

To the extent permitted by law, 3M shall not be liable for any loss or damage including any loss of business, loss of profits, or for any indirect, special, incidental or consequential loss or damage arising from reliance upon any information herein provided by 3M. Nothing in this statement will be deemed to exclude or restrict 3M's liability for death or personal injury arising from its negligence.



**3M Australia Pty Ltd**  
**Personal Safety Division**  
 Bldg A, 1 Rivett Road  
 North Ryde NSW 2113  
 Customer Service: 1300 363 565  
 Email: 3msupport.safety.au@mmm.com  
 Web: www.3M.com/au/ppesafety

**3M New Zealand Ltd**  
**Personal Safety Division**  
 94 Apollo Drive, Rosedale  
 Auckland 0632  
 Customer Service: 0800 252 627  
 Email: 3msupport.safety.nz@mmm.com  
 Web: www.3M.com/nz/ppesafety

PSD Products are Occupational Use Only.  
 3M, PELTOR and E-A-Rfit are trademarks of 3M. All other marks are property of their respective owner.  
 Please recycle. Printed in Australia.  
 © 3M 2025. All rights reserved.